

COMPUTATIONAL MORPHOLOGY
LIN 650
COURSE REVIEW

Jeffrey Heinz

December 10, 2018

THIS COURSE


1. Theory (regular grammars)
2. Application to Morphology (Roark and Sproat, chapters 1-3)
3. Programming with Pynini
4. Special Topics

REGULAR GRAMMARS FOR SETS AND TRANSFORMATIONS


1. Regular expressions
2. Finite-state machines
3. Monadic Second Order (MSO)-definability

Kleene 1956, Scott and Rabin 1959, Büchi 1960, Engelfriedt and Hoogeboom
2001

COMPUTING FUNCTIONS ON STRINGS: PATHS IN A MACHINE




COMPUTING FUNCTIONS ON STRINGS: PATHS IN A MACHINE




WHAT “REGULAR” MEANS

A set, relation, or function is regular provided **the memory required for the computation is bounded by a constant, regardless of the size of the input.**



Regular



Non-regular

PRODUCT CONSTRUCTIONS

We can *multiply* two machines together to create new machines.

- Intersection (sets)
- Union (sets)
- Composition (relations)

CLOSURE OPERATIONS

Properties	Languages	Relations
concatenation	yes	yes
Kleene star	yes	yes
union	yes	yes
intersection	yes	no
difference	yes	no
composition	–	yes
inversion	–	yes

APPLICATION TO MORPHOLOGY

- Morphemes are functions that transform strings.
- Application of a morpheme to a lexical item can be computed via composition.
- More generally, composition lets one build a large lexicon by applying a set of morphemes to an atomic lexicon and iterating.
- Unpredictable forms are managed by removing them from the domain of the predictable morphology, listing their transformations, and adding them back in.

MORPHOLOGICAL THEORY

1. Roark and Sproat claim that the distinctions between lexical-incremental and inferential-realizational dissolve in the light of computational analysis.
2. However, we saw that inferential-realizational can encompass lexical-incremental, it was not clear how lexical-incremental can handle cases of multiple exponence.

PROGRAMMING WITH PYNINI

- Installed from source!
- Became familiar with Pynini's syntax and operations to write scripts which compute morpho-phonologies.
- Studied rule application and how `cdrewrite` builds a transducer.
- Because it is a Python library, the sky is the limit.


SPECIAL TOPIC: LOGICAL CHARACTERIZATIONS

We saw how to use First Order logic to define regular sets.

1. $\forall x[\mathbf{a}(x)]$
2. $\exists x[\mathbf{a}(x)]$
3. $\forall x, y[(\mathbf{a}(x) \wedge S(x, y)) \rightarrow \neg \mathbf{a}(y)]$

SPECIAL TOPIC: LOGICAL CHARACTERIZATIONS


2: 2-way
1: 1-way
N: Non-deterministic
D: Deterministic
f: functional
I: Input
O: Output
S: Strictly
L: Local



Engelfriedt and Hooageboom 2001, Chandlee 2014, Filiot and Reynier 2016,
Chandlee and Lindell, forthcoming

SPECIAL TOPIC: LOGICAL CHARACTERIZATIONS


2: 2-way
1: 1-way
N: Non-deterministic
D: Deterministic
f: functional
I: Input
O: Output
S: Strictly
L: Local

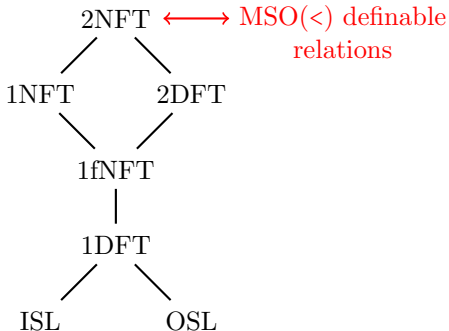

Engelfriedt and Hooeboom 2001, Chandlee 2014, Filiot and Reynier 2016, Chandlee and Lindell, forthcoming

SPECIAL TOPIC: LOGICAL CHARACTERIZATIONS


2: 2-way
1: 1-way
N: Non-deterministic
D: Deterministic
f: functional
I: Input
O: Output
S: Strictly
L: Local

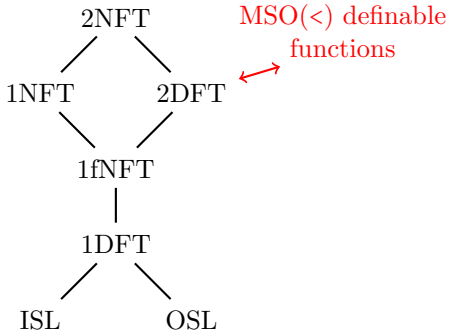

Engelfriedt and Hoo­geboom 2001, Chand­lee 2014, Filiot and Reynier 2016, Chand­lee and Lindell, forth­com­ing

SPECIAL TOPIC: LOGICAL CHARACTERIZATIONS

- 2: 2-way
- 1: 1-way
- N: Non-deterministic
- D: Deterministic
- f: functional
- I: Input
- O: Output
- S: Strictly
- L: Local



Quantifier Free (\triangleleft) \leftrightarrow definable

Engelfriedt and Hoogetboom 2001, Chandler 2014, Filiot and Reynier 2016, Chandler and Lindell, forthcoming

SPECIAL TOPIC: REDUPLICATION WITH 2DFTs

REDTYP: <https://github.com/jhdeov/RedTyp>


- SQL database of reduplicative processes
- Modeled 138 reduplicative processes across 90 languages using 57 2-way FSTs
- Average number of states: 8.8
- Largest number of states: 30 (1000s for 1-way FSTs)

Contributions

1. 2-way FSTs can model virtually all reduplication patterns.
2. ~87% belongs to a subclass which can be described as the “Concatenation of two OSL functions” (C-OSL).
3. Simple learning algorithm for C-OSL which uses OSLFIA but also a boundary-enriched sample.

THE ENCYCLOPEDIA OF CATEGORIES FOR MAPS

- 2: 2-way
- 1: 1-way
- N: Non-deterministic
- D: Deterministic
- f: functional
- I: Input
- O: Output
- S: Strictly
- L: Local



Engelfriedt and Hoozeboom 2001, Chandler 2014, Filiot and Reynier 2016,
Dolatian and Heinz 2018a,b

SPECIAL TOPIC: MACHINE LEARNING

Key Ideas

1. Minimum Description Length
2. Largest Common Structures
3. Bayesian Inference
4. Weighted FSTs
5. Neural Networks

Fun Challenge

- Morphological Re-inflection Challenge
- Unimorph

MORE SPECIAL TOPICS

- KATR, DATR
- multi-tape automata for morphology

STUDYING LINGUISTIC TYPOLOGY

Requires two books:

- “encyclopedia of categories”
- “encyclopedia of types”



Wilhelm Von
Humboldt

THAT'S IT!

Recommendations for next time

- Spend 1-2 weeks reviewing morphological theory, especially lexical-incremental approaches vis a vis inferential-realizational approaches
- The first pynini assignment should be one all students share in common. The second one can be different problems for each student.
- When going over some of the basics of automata in the beginning of the class, provide optional exercises for people to get more practice if they want it.

Thank You!